


VW VALVE CODE IMMO EMULATOR

In Universal Immo Emulator,
Solder jumper **J1, J3, J4 and J5**

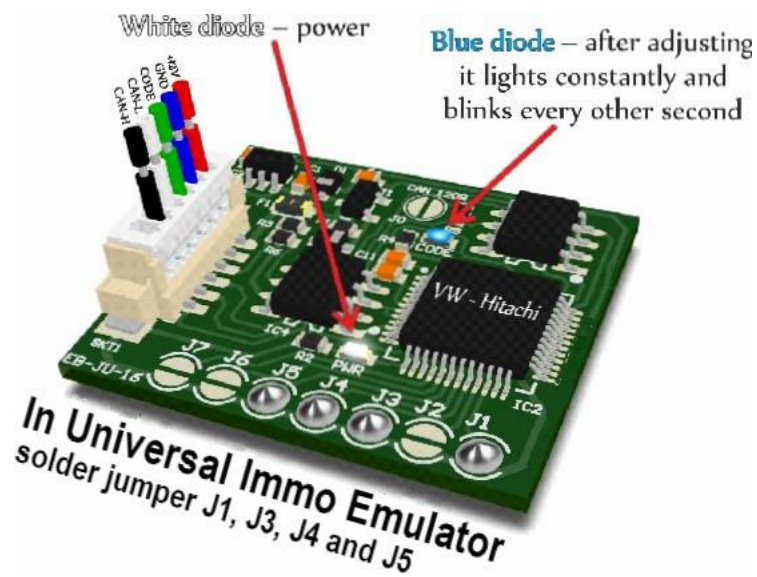


Connecting in place of the original immobilizer

+12V ACC	red
GND	blue
W-line	green

Unplug immo and Connect W-line with K-line to have a diagnosis
Connect W-line with K-line to have a diagnosis

Connecting emulator to the 6-pin plug of the immobiliser

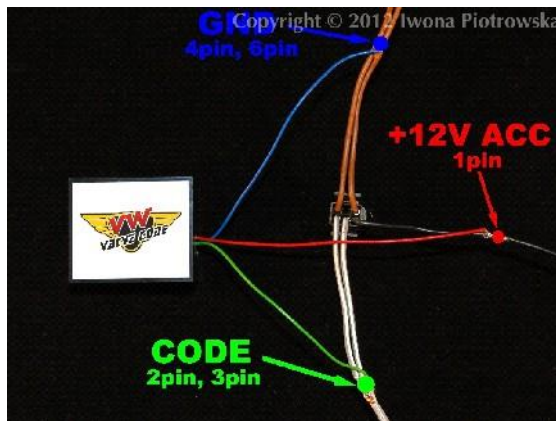

Above is 6-pin immo plug

GND	pin 4
ACC	and 6
K-line	pin 1
W-line	pin 3
	pin 2

Warning!!!

Due to possible construction changes of cars ,
check signals with multimeter in the ECU plug.

